

### GSD-SR

STC 35

STC 36

WDMA Extra Heavy Duty

SR5

### Construction

#### Horizontal Edges:

- Top and bottom rails
- Bonded to core
- Structural composite lumber
- 4" minimum on top rail
- 3" minimum on bottom rail
- No additional blocking required for thru bolted closers
- Contact factory for additional blocking options

#### Vertical Edges:

- Matching Vertical Edges
- Bonded to core
- Structural composite lumber (SCL) laminated with a matching veneer edge band

#### Core:

- Heavy Duty Sound Resistant (SR) Core material

#### Construction Grade:

- Aesthetic: WDMA "A" Premium Grade
- Acoustical Performance - STC 35 and STC 36. Tested in accordance with ASTM E90 and E413

#### Faces:

- Available in a variety of domestic and exotic wood species

#### Veneer Grade:

- Standard - WDMA "A" Book and Running Match
- Slip, Balance Match, and Center Balance available upon request
- "AA" available upon request to meet AWI "Premium Grade" requirements

#### Adhesive:


- Doors constructed using Polyurethane Reactive (PUR) Adhesive technology

#### Finishes:

- Factory Finish meets or exceeds WDMA TR-6 and AWI 1500 standards
- Available in 9 standard colors and custom color match

#### Notes:

- Available in 1-3/4" thickness only
- Single swing only - Pairs may affect STC rating
- Cylindrical and Mortise locks only - other hardware preps may affect STC rating and warranty
- Required Seals and Threshold included with price of the door
- Minimum size - 2'8" x 6'8"
- Maximum size - 4'0" x 8'0"
- Lifetime warranty with standard hinges and locks

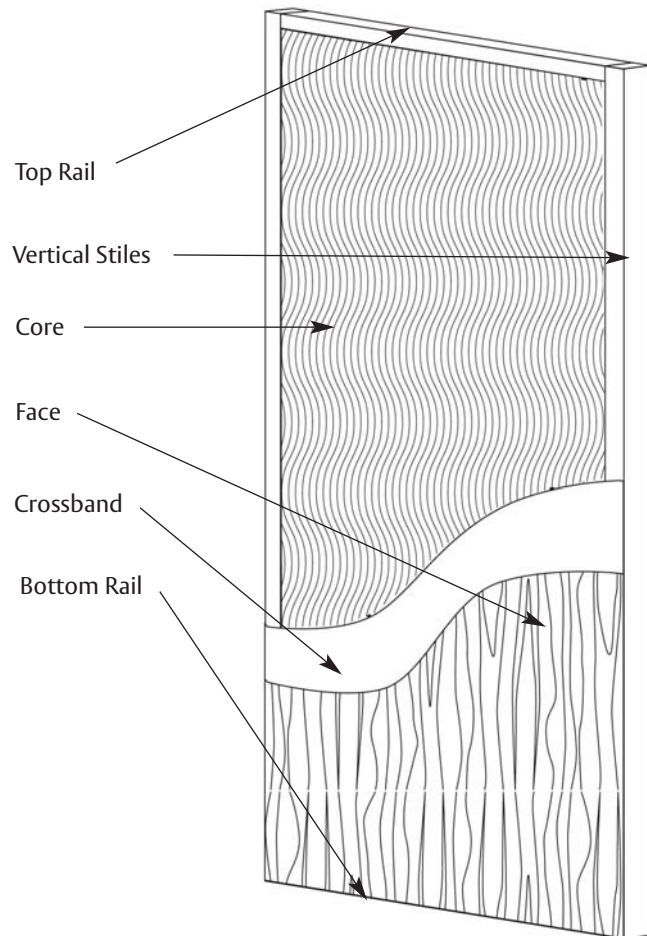

### GSD-SR

STC 42

STC 45

WDMA Extra Heavy Duty

SR5

### Construction

#### Horizontal Edges:

- Top and bottom rails
- Bonded to core
- Structural composite lumber
- 4" minimum on top rail
- 3" minimum on bottom rail
- No additional blocking required for thru bolted closers
- Contact factory for additional blocking options

#### Vertical Edges:

- Matching Vertical Edges
- Bonded to core
- Structural composite lumber (SCL) laminated with a matching veneer edge band

#### Core:

- Heavy Duty Sound Resistant (SR) Core material

#### Construction Grade:

- Aesthetic: WDMA "A" Premium Grade
- Acoustical Performance - STC 42 and STC 45. Tested in accordance with ASTM E90 and E413

#### Faces:

- Available in a variety of domestic and exotic wood species

#### Veneer Grade:

- Standard - WDMA "A" Book and Running Match
- Slip, Balance Match, and Center Balance available upon request
- "AA" available upon request to meet AWI "Premium Grade" requirements

#### Adhesive:

- Doors constructed using Polyurethane Reactive (PUR) Adhesive technology

#### Finishes:

- Factory Finish meets or exceeds WDMA TR-6 and AWI 1500 standards
- Available in 9 standard colors and custom color match

#### Notes:

- Available in 1-3/4" thickness only
- Single swing only - Pairs may affect STC rating
- Cylindrical and Mortise locks only - other hardware preps may affect STC rating and warranty
- Required Seals and Threshold included with price of the door
- Minimum size - 2'8" x 6'8"
- Maximum size - 4'0" x 8'0"
- Lifetime warranty with standard hinges and locks

