


SELECT™ Pin & Barrel continuous hinges

THE BEAUTY OF STAINLESS STEEL. SELECT introduces pin & barrel continuous hinges for those customers who sometimes require hinges made of stainless steel. The look of stainless steel can match, contrast or accent your building's design. Most order quantities of pin & barrel continuous hinges will be shipped in 48 hours ARO. Large volume orders may require longer lead times.

SELECT Advantages



CORROSION-RESISTANT STAINLESS STEEL
Creates a highly secure opening.



1/4-IN. STAINLESS STEEL ROD
Flexible and strong in abused openings.



NYLON SPLIT BEARINGS
Create a strong, free-moving assembly.



VARIETY OF FINISHES
Available in polished, brushed and painted finishes.



3-HR. FIRE RATING
No extra parts to buy or install.



TEMPLATED HOLE PATTERN
Makes installation easier and faster.




ADJUSTA-SCREW™ FASTENERS
Remedy out-of-square doors and frames easily.



END PINS
Prevent door action from dislodging hinge rod.

CONCEALED

Concealed surface mount.
No mortise required.
For doors up to 600 lb.

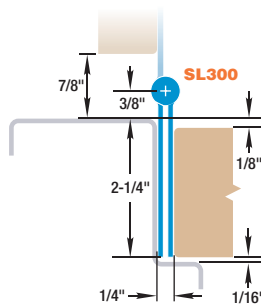


SL300

Our best selling stainless steel hinge. 1/8" door inset.

SWING CLEAR

Provides maximum clearance.
For doors up to 600 lb.

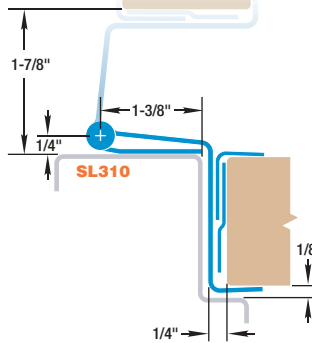


SL310

Stainless steel. Door guard protects door at hinge edge. Adjusta-Screw™ fasteners included.*

HALF SURFACE

Mounts on door face and frame rabbet.
For doors up to 600 lb.

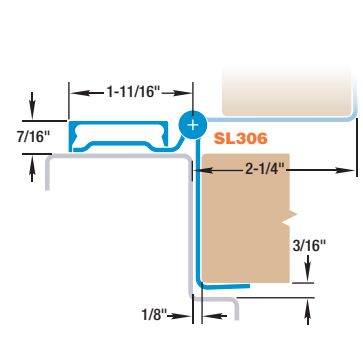


SL306

Stainless steel half mortise hinge. Tamper-resistant door leaf cover. Door guard.


FULL SURFACE

Surface mount on face of existing or new door and frame. Suitable for retrofit or new construction.

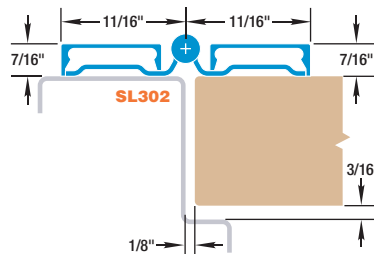

SL302

Stainless steel flush mount hinge. Tamper-resistant door leaf cover.

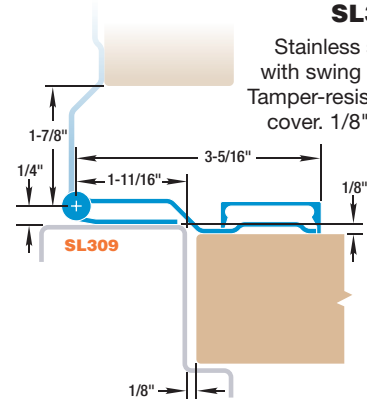


SL309

Stainless steel hinge with swing clear action. Tamper-resistant door leaf cover. 1/8" door inset.

Call or visit our Web site for complete hinge specifications.

*ADJUSTA-SCREW™ FASTENERS



Available on SELECT pin & barrel door guard models, Adjusta-Screw™ fasteners help you square doors accurately and easily in new or retrofit installations by adjusting to correct frame fit variances up to 3/8" along the entire length of the door.



Sweets



COMSENSE INC.



tectonic network



NGA NATIONAL GARD ASSOCIATION



Geared to ship in 48 HOURS™